
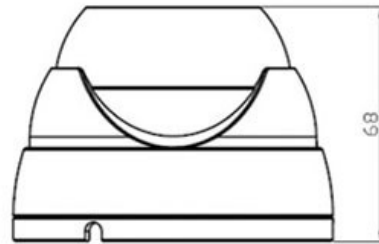


CP- ENC-D41L3-D

4 MP Full HD WDR IR Dome Camera - 30Mtr.

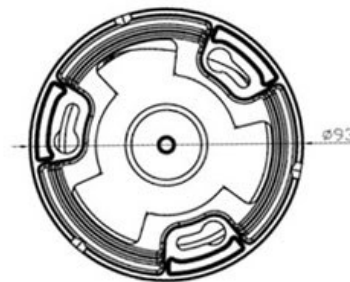

Main Features

- 1/3" 4MP CMOS Image Sensor
- Max 25fps@4MP
- H.265 / H.264 Video Compression
- WDR (100dB), Day/Night (ICR), AWB, AGC, BLC
- 3.6mm lens (6mm optional)
- IR Range of 30 Mtrs, IP66
- Mobile Software: cMOB-20
- CMS Software: RVMS Pro



*Product casing and specifications are subject to change without prior notice

CP- ENC-D41L3-D

4 MP Full HD WDR IR Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
White Balance
Gain Control (AGC)
Lens
Back Light Compensation
Video Compression
Video Streaming
Resolution
Frame Rate
ICR
WDR
Protocol
Ethernet
IR
Smart Phone
Operating Temperature
Power Source
Weatherproof Standard
Dimension
Weight

Specification

1/3" 4MP CMOS Image Sensor
0.01Lux@F1.2(Color)/0.001Lux@F1.2(B/W)
Auto/Manual
Auto/Manual
3.6mm Lens (6mm optional)
Auto/Manual
H.265 / H.264
Dual Stream
4M(2560x1440) / 3M(2048x 1536)/1080P(1920x 1080) / 720P(1280x 720) /D1(704x 576) /
CIF(352x 288)
Main Stream : 4 MP@25fps , Sub-Stream: D1
IR CUT
WDR (100dB)
ONVIF Support (profile S)
RJ-45 (10/100Base-T)
IR Range of 30 Mtr.
iPhone, iPad, Android
-20°C~+65°C
DC12V±10%, PoE
IP66
93mm x 68mm
315g