


# CP-UNC-TA40L3-V3

4 MP Full HD Network IR Bullet Camera - 30Mtr.

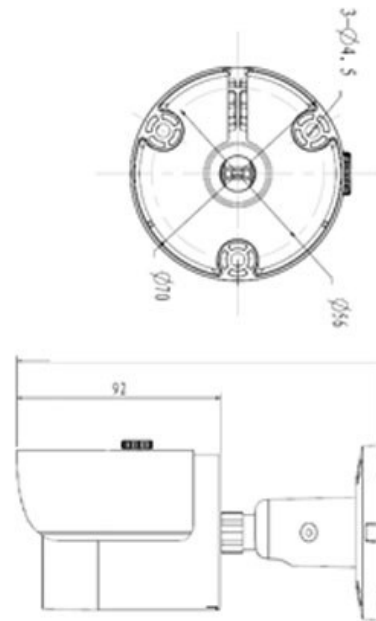

## Main Features

- 1/3" 4MP PS CMOS Image Sensor
- Max 20fps@4M(2688x1520) , 25/30fps@3M(2304x1296)
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 2.8mm fixed lens (3.6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



\*Product casing and specifications are subject to change without prior notice

# CP- UNC-TA40L3-V3

## 4 MP Full HD Network IR Bullet Camera - 30Mtr.



### Feature

Image Sensor  
Effective Pixels  
Minimum Illumination  
Shutter Speed  
White Balance  
Lens  
Gain Control (AGC)  
S/N Ratio  
Video Compression  
Back Light Compensation  
Video Streaming  
Resolution  
Privacy Mask  
Bit Rate  
Protocol  
Ethernet  
User Account  
Smart Phone  
IR  
Ingress Protection  
Operating Temperature  
Power Source  
Power Consumption  
Dimension  
Weight

### Specification

1/3" 4MP Progressive scan CMOS  
2688(H) x 1520(V)  
0.1Lux/F2.0(Color), 0Lux/F2.0(IR on)  
Auto/Manual, 1/3(4)s~1/100000s  
Auto/Manual  
2.8mm (3.6mm optional)  
Auto/Manual  
More than 50dB  
H.264/ H.264H/ H.264B/ MJPEG  
BLC/ HLC/ DWDR  
Main Stream: 4M(1 ~ 20fps)/3M(1 ~ 25/30fps) , Sub Stream: D1(1 ~ 25/30fps)  
4M(2688x1520)/3M(2304x1296)/1080P(1920x1080)/720P(1280x720)/ D1  
(704x576/704x480) /CIF(352x288/352x240)  
Up to 4 areas  
H.264: 32kbps~8192kbps  
IPv4/IPv6, HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, RTSP, RTP, SMTP, NTP, DHCP, DNS,  
PPPOE, DDNS, FTP, IP Filter, QoS ONVIF, CGI  
RJ-45 (10/100Base-T)  
20 Users  
iPhone, iPad, Android Phone  
IR Range of 30 Mtr.  
IP67  
-30°C~+60°C , Less than 95%RH  
DC12V, PoE (802.3af)  
<4.3W(IR on)  
Φ70mm x 165mm  
0.38Kg(with package 0.44 Kg)