


CP- UNC-TA40L5-VM**4 MP Full HD Network IR Bullet Camera - 50Mtr.****Main Features**

- 1/3" 4MP PS CMOS Image Sensor
- Max 20fps@4M(2688×1520) , 25/30fps@3M(2304×1296)
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 50 Mtrs, IP67, SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

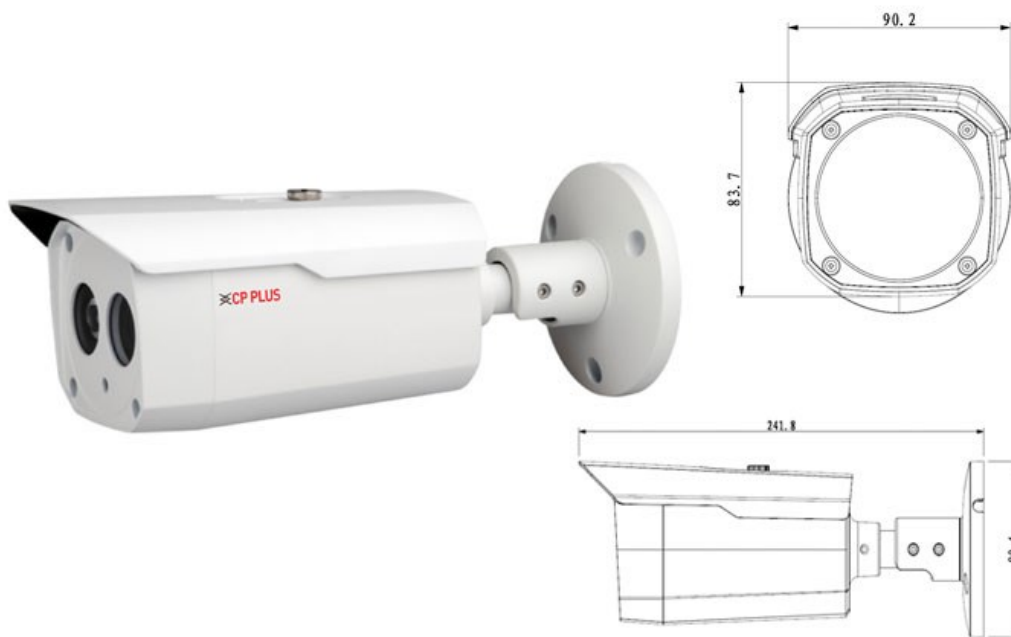

CP- UNC-TA40L5-VM

4 MP Full HD Network IR Bullet Camera - 50Mtr.



Feature

Image Sensor

Effective Pixels

Minimum Illumination

Shutter Speed

White Balance

Lens

Gain Control (AGC)

Video Compression

S/N Ratio

Back Light Compensation

Video Streaming

Resolution

Privacy Mask

Audio Input

Audio Output

Audio Compression

Alarm IN

Alarm Out

Motion Detection

Bit Rate

Protocol

Ethernet

User Account

IR

Smart Phone

Micro SD

Ingress Protection

Operating Temperature

Power Source

Power Consumption

Specification

1/3" 4MP Progressive scan CMOS

2688(H) x 1520(V)

0.1Lux/F2.0(Color), 0Lux/F2.0(IR on)

Auto/Manual, 1/3(4)s~1/100000s

Auto/Sunny/Night/Outdoor/Customized

3.6mm (6mm optional)

Auto/Manual

H.264/H.264H/H.264B

More than 50dB

BLC/ HLC/ DWDR

Main Stream: 4M(1 ~ 20fps)/3M(1 ~ 25/30fps) , Sub Stream: D1/CIF(1~20fps)

4M(2688x1520)/3M(2304x1296)/1080P(1920x1080)/720P(1280x720)/ D1 (704x576/704x480) /CIF(352x288/352x240)

Up to 4 areas

1 channel

1 channel

G.711a/ G.711u/ AAC

1 channel

1 channel

Supports

H.264: 32Kbps~10Mbps

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)

20 Users

IR Range of 50 Mtr.

iPhone, iPad, Android Phone

Micro SD Max 128GB

IP67

-30°C~+60°C , Less than 95%RH

DC12V, PoE (802.3af)

Max 4.9W



 **CP- UNC-TA40L5-VM****4 MP Full HD Network IR Bullet Camera - 50Mtr.****Feature**

Dimension

Weight

Specification

Φ90.4mm x 241.8mm

0.61Kg (with package 0.80kg)