


# CP-UNC-TA41L3-D

4 MP WDR Network IR Bullet Camera - 30Mtr.

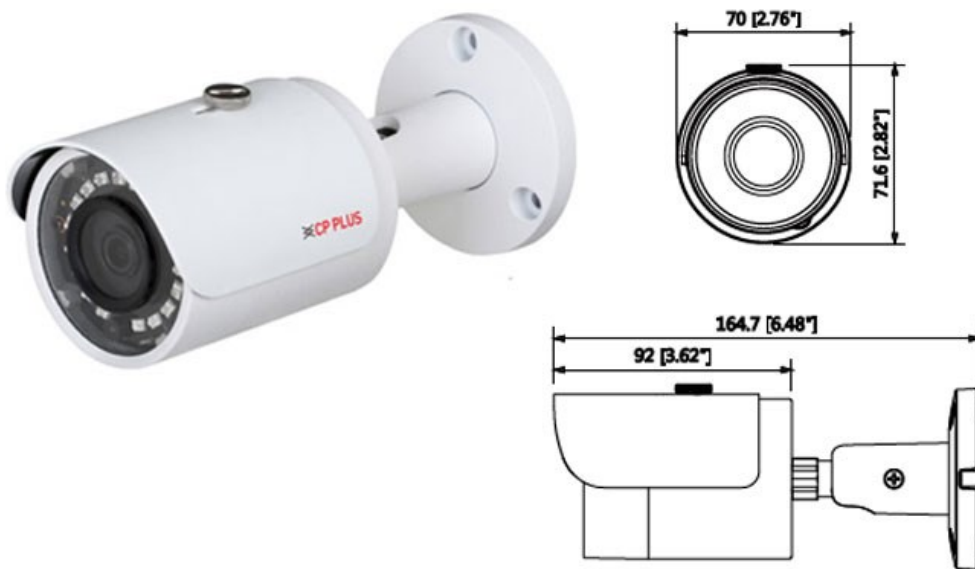

## Main Features

- 1/3" 4MP PS CMOS Image Sensor
- Max. 20fps@4MP, Max. 25/30fps@3MP
- H.265 and H.264 dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR,ROI, EIS, AWB, AGC, BLC, HLC
- 2.8mm fixed lens (3.6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



\*Product casing and specifications are subject to change without prior notice

# CP- UNC-TA41L3-D

## 4 MP WDR Network IR Bullet Camera - 30Mtr.



### Feature

Image Sensor

Effective Pixels

Minimum Illumination

Shutter Speed

White Balance

Lens

Gain Control (AGC)

Back Light Compensation

S/N Ratio

Video Compression

Video Streaming

Resolution

Digital Zoom

Motion detection

Privacy Mask

ROI

Bit Rate

Protocol

Ethernet

User Account

IR

Smart Phone

Ingress Protection

Operating Temperature

Power Source

Power Consumption

Dimension

Weight

### Specification

1/3" 4MP Progressive scan CMOS

2688(H) x 1520(V)

0.08Lux/F2.0( Color,1/3s,30IRE) 0.3Lux/F2.0( Color,1/30s,30IRE) 0Lux/F2.0(IR on)

Auto/Manual, 1/3(4)~1/100000s

Auto/Natural/Street Lamp/Outdoor/Manual

2.8mm(3.6mm optional)

Auto/Manual

BLC / HLC / WDR(120dB)

More than 45dB

H.265+/H.265/H.264+/H.264

Main Stream: 4MP(1 ~ 20fps) /3MP(1 ~ 25/30fps),Sub Stream: D1/CIF(1 ~ 25/30fps)

4MP(2688x1520/2560x1440)/3MP(2304x1296)/ 1080P(1920x1080)/720P(1280x720)/ D1 (704x576/704x480)/ CIF(352x288/352x240)

16x

Off / On (4 Zone, Rectangle)

Off / On (4 Area, Rectangle)

Off / On (4 Zone)

H.265: 12K ~ 8448Kbps , H.264: 32K ~ 10240Kbps

HTTP;TCP;ARP;RTSP;RTP;UDP;RTCP;SMTP;FTP;DHCP;DNS;DDNS;PPPOE;IPv4/v6; SNMP; QoS; UPnP; NTP;ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)

20 Users

IR Range of 30 Mtr.

iPhone, iPad, Android Phone

IP67

-30°C~+55°C , Less than 95%RH

DC12V, PoE (802.3af)

<5.7W

Φ70mm x 164.7mm

0.38Kg