


**CP- UNC-TD40R8-MD****4 MP Full HD WDR IR Bullet Camera - 80Mtr.****Main Features**

- 1/3" 4Megapixel PS CMOS Image Sensor
- 20fps@4MP, 25/30fps@3MP
- H.264 and MJPEG triple-stream encoding
- WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 6mm fixed lens (3.6 mm Optional)
- IR Range of 80 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

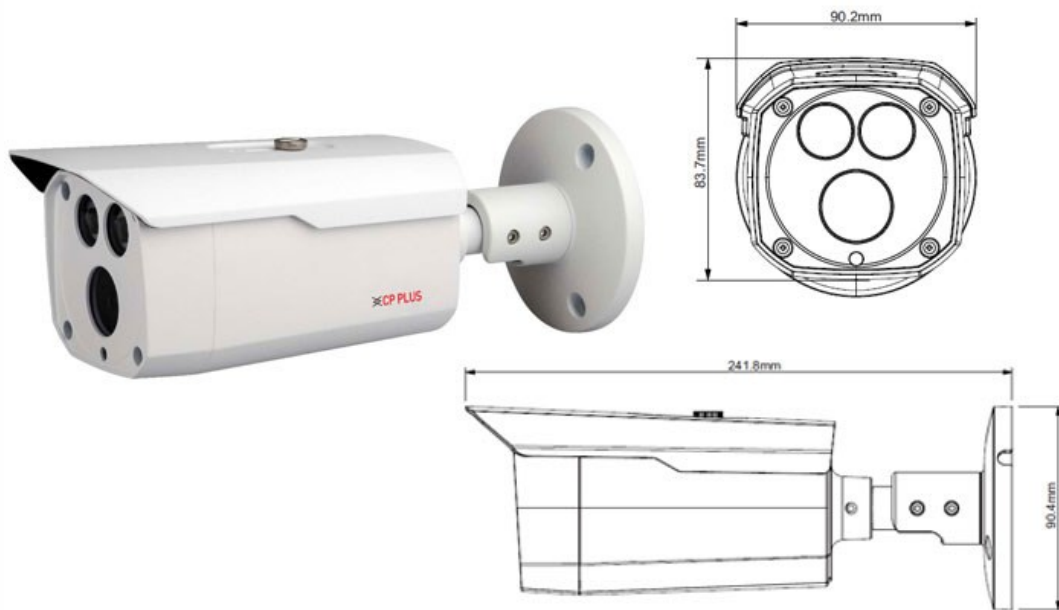

# CP- UNC-TD40R8-MD

4 MP Full HD WDR IR Bullet Camera - 80Mtr.



## Feature

Image Sensor  
 Minimum Illumination  
 Shutter Speed  
 White Balance  
 Lens  
 Gain Control(AGC)  
 Back Light Compensation  
 S/N Ratio  
 Video Compression  
 Video Streaming  
 Resolution  
 Privacy Mask  
 ICR  
 WDR  
 Protocol  
 Smart Detection  
 Ethernet  
 User Account  
 Smart Phone  
 IR  
 Micro SD  
 Operating Temperature  
 Power Source  
 Power Consumption  
 Weatherproof Standard  
 Dimension  
 Weight

## Specification

1/3" 4Megapixel progressive scan CMOS  
 0.01Lux/F2.0 (Color), 0Lux/F2.0(IR on)  
 Auto/Manual, 1/3(4)~1/10000s  
 Auto/Manual  
 6mm fixed lens (3.6 mm Optional)  
 Auto/Manual  
 BLC / HLC / WDR  
 More than 50dB  
 H.264/H.264H/H.264B/MJPEG  
 Main Stream: 4M(1~20fps)/3M(1~25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1-5/8fps) (WDR on), 720P(1-18/2fps) (WDR off)  
 4M(2560× 1440)/3M(2304× 1296)/1080P(1920× 1080)/720P(1280×720)/D1(704× 576/704× 480) /CIF(352× 288/352× 240)  
 Up to 4 areas  
 Auto(ICR)/Color/B/W  
 Supports  
 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI  
 Tripwire, Intrusion, Scene Change, Face detect  
 RJ-45 (10/100Base-T)  
 20 Users  
 iPhone, iPad, Android, Windows Phone  
 IR Range of 80 Mtr.  
 Micro SD Max 128GB  
 -40°C~+60°C, Less than 95% RH  
 DC12V, PoE (802.3af)  
 Max 4.9W  
 IP67  
 Ø 90.4mm× 241.8mm  
 0.8kg

