
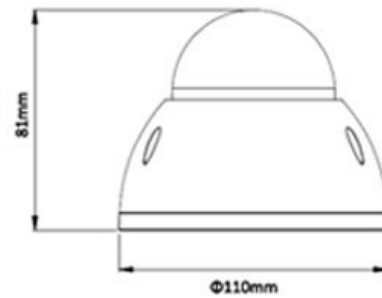


CP-UNC-VA40L3-V3

4 MP Full HD IR Vandal Dome Camera - 30Mtr.



Main Features

- 1/3" 4MP PS CMOS Image Sensor
- Max 20fps@4M(2688x1520),25/30fps@3M(2304x1296)
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (2.8mm optional)
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-VA40L3-V3

4 MP Full HD IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Effective Pixels
Shutter Speed
White Balance
Lens
Gain Control (AGC)
Video Compression
S/N Ratio
Back Light Compensation
Video Streaming
Resolution
Privacy Mask
Bit Rate
Protocol
Ethernet
User Account
Smart Phone
IR
Ingress Protection
Operating Temperature
Power Source
Power Consumption
Dimension
Weight

Specification

1/3" 4MP Progressive scan CMOS
0. 1Lux/F2.0(Color), 0Lux/F2.0(IR on)
2688(H) x 1520(V)
Auto/Manual, 1/3(4)~1/100000s
Auto/Manual
3.6mm(2.8mm optional)
Auto/Manual
H.264/ H.264H/ H.264B/ MJPEG
More than 50dB
BLC/ HLC/ DWDR
Main Stream: 4M(1 ~ 20fps)/3M(1 ~ 25/30fps) , Sub Stream: D1(1 ~ 25/30fps)
4M(2688×1520)/3M(2304×1296)/1080P(1920×1080)/720P(1280×720)/ D1
(704×576/704×480) /CIF(352×288/352×240)
Up to 4 areas
H.264: 32kbps~8192kbps
IPv4/IPv6, HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, RTSP, RTP, SMTP, NTP, DHCP, DNS,
PPPOE, DDNS, FTP, IP Filter, QoS ONVIF, CGI
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android Phone
IR Range of 30 Mtr.
IP67 & IK10
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<4.7W(IR on)
Φ110mm × 81mm
0.33Kg(with package 0.47Kg)

