
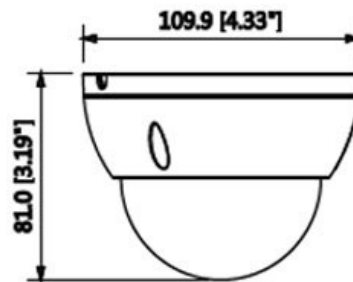


CP-UNC-VA41L3-D

4 MP WDR Network IR Vandal Dome Camera - 30Mtr.

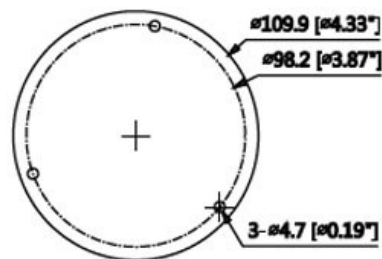

Main Features

- 1/3" 4MP PS CMOS Image Sensor
- Max. 20fps@4MP, Max. 25/30fps@3MP
- H.265 and H.264 dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR,EIS,ROI, AWB, AGC, BLC,HLC
- 2.8 mm fixed lens (3.6 mm optional)
- IR Range of 30 Mtrs, IP67,IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-VA41L3-D

4 MP WDR Network IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Effective Pixels
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control (AGC)
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Digital Zoom
Motion detection
Privacy Mask
ICR
ROI
Bit Rate
Protocol
Ethernet
User Account
IR
Smart Phone
Ingress Protection
Operating Temperature
Power Source
Power Consumption
Dimension
Weight

Specification

1/3" 4MP Progressive scan CMOS
2688(H) x 1520(V)
0.08Lux/F2.0(Color,1/3s,30IRE) 0.3Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)
Auto/Manual, 1/3(4)~1/100000s
Auto/Natural/Street Lamp/Outdoor/Manual
2.8mm (3.6mm optional)
Auto/Manual
BLC / HLC / WDR(120dB)
More than 45dB
H.265+/H.265/H.264+/H.264
Main Stream: 4MP(1 ~ 20fps)/3MP(1 ~ 25/30fps),Sub Stream: D1/CIF(1 ~ 25/30fps)
4MP(2688x1520/2560x1440)/3MP(2304x1296)/ 1080P(1920x1080)/720P(1280x720)/ D1
(704x576/704x480)/ CIF(352x288/352x240)
16x
Off / On (4 Zone, Rectangle)
Up to 4 areas
Auto (ICR) / Color / B/W
Off / On (4 Zone)
H.265: 12K ~ 8448Kbps , H.264: 32K ~ 10240Kbps
HTTP/HTTPS; TCP;ARP;RTSP;RTP;UDP;SMTP;FTP; DHCP;DNS;DDNS;PPPOE;IPv4/v6;QoS; UPnP;
NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; ONVIF, PSIA, CGI
RJ-45 (10/100Base-T)
20 Users
IR Range of 30 Mtr.
iPhone, iPad, Android Phone
IP67 & IK10
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<4.58W
Φ109.9mm x 81mm
0.34Kg