
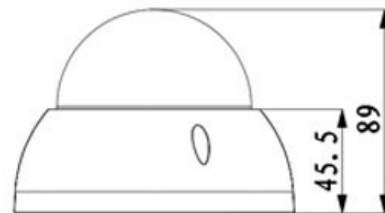


# CP- UNC-VB40ZL3-VMD

4 MP Full HD IR Vandal Dome Camera - 30Mtr.



## Main Features

- 1/3" 4MP PS CMOS Image Sensor
- Max 20fps@4M and 25/30fps@3M
- H.264 and MJPEG dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 2.7~12mm Motorized lens
- IR Range of 30 Mtrs, IP67, IK10, PoE, SD Card
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



\*Product casing and specifications are subject to change without prior notice

# CP- UNC-VB40ZL3-VMD

4 MP Full HD IR Vandal Dome Camera - 30Mtr.



## Feature

Image Sensor  
Minimum Illumination  
Shutter Speed  
White Balance  
Lens  
Gain Control (AGC)  
Video Compression  
S/N Ratio  
Back Light Compensation  
Video Streaming  
Resolution  
Privacy Mask  
ICR  
Protocol  
Ethernet  
User Account  
Smart Phone  
IR  
Micro SD  
Ingress Protection  
Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

## Specification

1/3" 4Megapixel progressive scan CMOS  
0. 1Lux/F1.4(Color); 0Lux/F1.4(IR on)  
Auto/Manual, 1/3(4)~1/100000s  
Auto/Manual  
2.7mm~12mm  
Auto/Manual  
H.264/ H.264H/ H.264B/ MJPEG  
More than 50dB  
BLC/ HLC/ WDR  
Main Stream: 4M(1~20fps)/3M(1~25/30fps), Sub Stream: D1/CIF(1 ~ 25/30fps)  
4M(2688×1520)/4M(2560×1440)/3M(2304×1296)/1080P(1920×1080)/720P(1280×720)/D1  
(704×576/704×480)/CIF(352×288/352×240)  
Up to 4 areas  
Auto (ICR)/Color/B/W  
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP,  
DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x, ONVIF, PSIA, CGI  
RJ-45 (10/100Base-T)  
20 Users  
iPhone, iPad, Android Phone  
IR Range of 30 Mtr.  
Max 128GB  
IP67  
-30°C~+60°C , Less than 95%RH  
DC12V, PoE (802.3af)  
<7.5W  
IP67 & IK10  
φ122mm × 89mm  
0.5kg