


# CP- UNC-VB41ZL3-VMD

4MP Full HD WDR IR Vandal Dome Camera - 30Mtr.

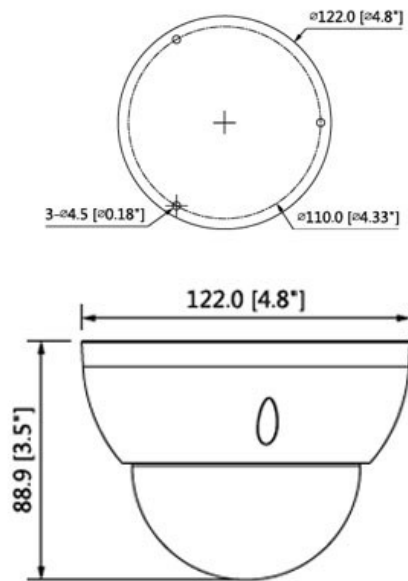

## Main Features

- 1/3" 4MP PS CMOS Image Sensor
- Max 20fps@4MP and 25/30fps@3MP
- H.265 and H.264 dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
- 2.7~13.5mm motorized lens
- IR Range of 30 Mtrs, IP67, IK10, PoE, SD Card
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



\*Product casing and specifications are subject to change without prior notice

# CP- UNC-VB41ZL3-VMD

## 4MP Full HD WDR IR Vandal Dome Camera - 30Mtr.



### Feature

Image Sensor  
Effective Pixels  
Minimum Illumination  
Shutter Speed  
White Balance  
Lens  
Gain Control (AGC)  
Video Compression  
Back Light Compensation  
S/N Ratio  
Video Streaming  
Resolution  
Digital Zoom  
Motion detection  
Privacy Mask  
ICR  
ROI  
Audio Input  
Audio Output  
Audio Compression  
Alarm IN  
Alarm Out  
Bit Rate  
Protocol  
Ethernet  
User Account  
Smart Phone  
IR  
Micro SD

### Specification

1/3" 4Megapixel progressive scan CMOS  
2688(H) x 1520(V)  
0.03Lux/F1.4( Color,1/3s,30IRE) 0.3Lux/F1.4( Color,1/30s,30IRE) 0Lux/F1.4(IR on)  
Auto/Manual, 1/3(4)~1/100000s  
Auto/Natural/Street Lamp/Outdoor/Manual  
2.7mm~13.5mm motorized lens  
Auto/Manual  
H.265+/H.265/H.264+/H.264  
BLC / HLC / WDR(120dB)  
More than 45dB  
Main Stream: 4MP (1~20fps) / 3MP (1~25/30fps), Sub Stream: D1/CIF(1 ~ 25/30fps)  
(2688x1520)/(2560x1440)/(2304x1296)/1080P(1920x1080)/SXGA(1280x1024)/1.3M(1280x960)/720P(1280x720)/D1(704x576/704x480)/VGA(640x480)/CIF(352x288/352x240)  
16x  
Off / On (4 Zone, Rectangle)  
Off / On (4 Area, Rectangle)  
Auto (ICR)/Color/B/W  
Off / On (4 Zone)  
1 channel  
1 channel  
N/AG.711A;G.711Mu;G.726;AAC  
1 channel In: 5mA 5VDC  
1 channel Out: 300mA 12VDC  
H.265: 12K ~ 8448Kbps , H.264: 32K ~ 10240Kbps  
HTTP;TCP;ARP;RTSP;RTP;UDP;RTCP;SMTP;FTP;DHCP;DNS; DDNS; PPPOE; IPv4/v6;SNMP; QoS;  
UPnP; NTP; ONVIF, PSIA, CGI  
RJ-45 (10/100Base-T)  
20 Users  
iPhone, iPad, Android Phone  
IR Range of 30 Mtr.  
SD Card, Max 128GB



\*Product casing and specifications are subject to change without prior notice

# CP- UNC-VB41ZL3-VMD

4MP Full HD WDR IR Vandal Dome Camera - 30Mtr.



## Feature

Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

## Specification

-30°C~+60°C , Less than 95%RH  
DC12V, PoE (802.3af)  
<8.5W  
IP67 & IK10  
φ122mm x 88.9mm  
0.4 Kg