


# CP- UNC-VD41L3-VMD

4 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.

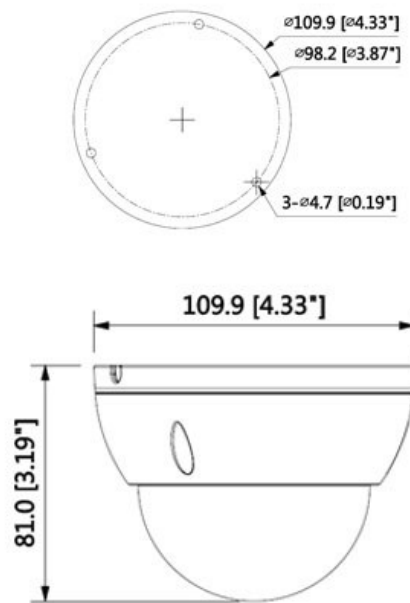

## Main Features

- 1/3" 4Megapixel PS CMOS Image Sensor
- 25/30fps@4M(2688x1520)
- H.265 and H.264 Triple - stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (2.8mm, 6mm optional)
- IR Range of 30 Mtrs, IP67, IK10, PoE, SD Card
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



\*Product casing and specifications are subject to change without prior notice

# CP- UNC-VD41L3-VMD

## 4 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.



### Feature

Image Sensor  
Minimum Illumination  
Shutter Speed  
White Balance  
Gain Control (AGC)  
Lens  
S/N Ratio  
Back Light Compensation  
Video Compression  
Video Streaming  
Resolution  
Digital Zoom  
Motion detection  
Privacy Mask  
ICR  
ROI  
Audio Input  
Audio Compression  
Audio Output  
Alarm IN  
Alarm Out  
Protocol  
Smart Detection  
Ethernet  
User Account  
IR  
Smart Phone  
Micro SD

### Specification

1/3" 4Megapixel progressive scan CMOS  
0.08Lux/F2.0 (Color), 0Lux/F2.0 (IR on)  
Auto/Manual, 1/3(4)~1/100000s  
Auto/Manual  
Auto/Manual  
3.6mm(2.8mm, 6mm optional)  
More than 50dB  
BLC / HLC / WDR(120dB)  
H.265+/H.265/H.264+/H.264  
Main Stream: 4M(1~25/30fps), Sub Stream D1/CIF(1~25/30fps),Third Stream: 720P(1~25/30fps)  
4M(2688×1520) / 3M(2304×1296) / 1080P(1920×1080) / 1.3M(1280×960) / 720P(1280×720) / D1(704×576/704×480) / VGA(640×480) / CIF(352×288/352×240)  
16x  
Off / On (4 Zone, Rectangle)  
Up to 4 areas  
Auto (ICR)/Color/B/W  
Off / On (4 Zone)  
1 Ch.  
G.711a/ G.711Mu/ AAC/ G.726  
1 Ch.  
1 Ch.  
1 Ch.  
HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF, PSIA, CGI  
Tripwire, Intrusion, Object Abandoned/Missing, Face Detection  
RJ-45 (10/100Base-T)  
20 Users  
IR Range of 30 Mtr.  
IOS, Android  
Micro SD, Max 128GB



\*Product casing and specifications are subject to change without prior notice

# CP- UNC-VD41L3-VMD

4 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.



## Feature

Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

## Specification

-30°C~+60°C, Less than 95% RH  
DC12V, PoE (802.3af)  
Max 5W  
IP67 & IK10  
Φ109.9mm × 81mm (4.33"×3.19")  
0.41kg (0.91lb)