


CP- VNC-V41FR3-VMD

4 MP WDR Array Vandal Dome Camera - 30Mtr.

INDIGO

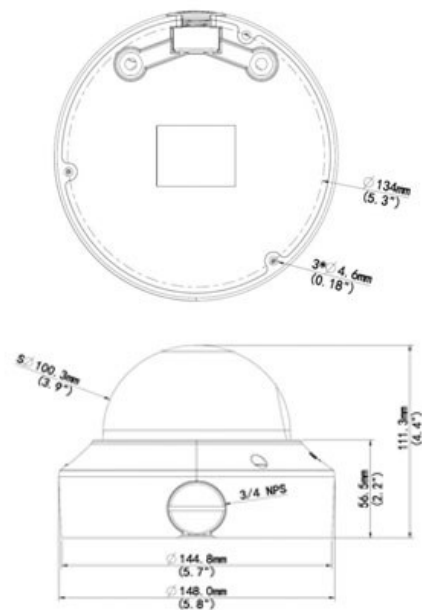

Main Features

- 1/3" 4MP PS CMOS Image Sensor
- Max: 20 fps@4MP(2592×1520) , Max: 25 fps@ 4MP(2560×1440)
- H.265, H.264, MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), Corridor mode, 3D-DNR, ROI, AWB, AGC, BLC
- 2.8~12 mm Varifocal Lens
- IR Range of 30 Mtrs, Smart IR, Micro SD, IP67, IK10, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS



Instastream

CE FCC RoHS COMPLIANT

*Product casing and specifications are subject to change without prior notice

CP- VNC-V41FR3-VMD

4 MP WDR Array Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control (AGC)
Video Compression
S/N Ratio
Video Streaming
Resolution
Video Output
Frame Rate
Privacy Mask
ICR
ROI
Audio Input
Audio Compression
Audio Output
Alarm IN
Alarm Out
WDR
Protocol
Smart Detection
Ethernet
OSD
IR
Micro SD
Audio
Operating Temperature

Specification

1/3" 4MP Progressive scan CMOS
Colour: 0.02 Lux (F1.6, AGC ON) 0 Lux with IR
Auto/Manual, 1/6~1/100000 s
Auto/Manual
2.8~12 mm Varifocal Lens
Auto/Manual
H.265, H.264, MJPEG
>55dB
Triple
2592 × 1520
1 BNC, impedance 75Ω; amplitude 1 V [p-p]
Max: 20 fps@4MP (2592×1520) , Max: 25 fps@4MP (2560×1440) , Max: 30 fps@3MP (2048×1520) , Max: 30 fps@1080P (1920×1080)
Up to 4 areas
IR-cut filter with auto switch (ICR)
Supports
impedance 35 kΩ; amplitude 2 V [p-p]
G.711
impedance 600Ω; amplitude 2 V [p-p]
1 IN
1 Out
Optical WDR (up to 120dB)
L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SIP, 802.1x, ONVIF, API
Intrusion, crossing line, Motion detection, Audio detection, Face detection, Defocus, Scene Change, People counting
1 RJ45 10M/100M Base-TX Ethernet
Up to 8 OSDs
Array Range of 30 Mtr., Smart IR
Micro SD, Up to 128 GB
Two-way audio Supported
-40°C ~ +60°C (-40°F ~ 140°F)



CP- VNC-V41FR3-VMD

4 MP WDR Array Vandal Dome Camera - 30Mtr.



Feature

Humidity

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

≤ 95% RH (non-condensing)

12 V DC, or PoE (IEEE802.3 af)

Max.6.6 W (PoE :Max.7.2 W)

IP67 & IK10

Φ148 x 111.3 mm (Ø5.8" x 4.4")

0.75 kg