



CP- VNC-V41L3-D

4 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.

INDIGO

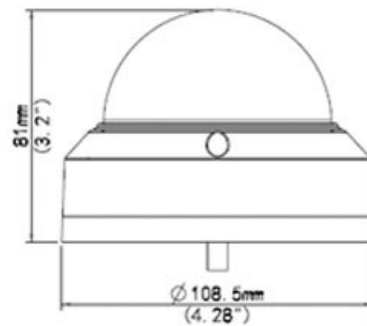

Main Features

- 1/3" 4MP PS CMOS Image Sensor
- Max: 20 fps@4MP(2592×1520) , Max: 25 fps@ 4MP(2560×1440)
- H.265, H.264, MJPEG Triple-stream encoding
- WDR, Day/Night (ICR), Corridor mode, 2D/3D-DNR, ROI, AWB, AGC, BLC
- 2.8mm Lens (4mm Optional)
- IR Range of 30 Mtrs, Smart IR, IP66, IK10, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS



InstaStream

CE FC RoHS COMPLIANT

*Product casing and specifications are subject to change without prior notice

CP- VNC-V41L3-D

4 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control (AGC)
S/N Ratio
Video Compression
Video Streaming
Resolution
Frame Rate
Privacy Mask
ICR
ROI
WDR
Protocol
Ethernet
IR
OSD
Operating Temperature
Humidity
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 4MP Progressive scan CMOS
Colour: 0.2 Lux (F2.2, AGC ON) 0 Lux with IR
Auto/Manual, 1/6~1/100000 s
Auto/Manual
2.8mm Lens (4mm Optional)
Auto/Manual
>52dB
H.265, H.264, MJPEG
Triple
2592 × 1520
Max: 20 fps@4MP (2592×1520) , Max: 25 fps@4MP (2560×1440) , Max: 30 fps@3MP (2048×1520) , Max: 30 fps@1080P (1920×1080)
Up to 8 areas
IR-cut filter with auto switch (ICR)
Supports
Supports
IPv4, IGMP, ICMP, ARP, TCP, L2TP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SIP, 802.1x, ONVIF, API
1 RJ45 10M/100M Base-TX Ethernet
IR Range of 30 Mtr., Smart IR
Up to 8 OSDs
-35°C ~ +60°C (-31°F ~ 140°F)
≤ 95% RH (non-condensing)
12 V DC, or PoE (IEEE802.3 af)
Max 5.0W
IP66 & IK10
Φ108.5 x 81 mm (Ø4.28" x 3.2")
0.3 kg