


CP- UNP-3021D-P**2MP 30x Network Box Zoom Camera****Main Features**

- 1/2.8" 2MP CMOS Image sensor
- Max. 50/60fps@1080P
- Powerful 30x Optical and 16x Digital zoom
- H.265/ H.264/ MJPEG Dual-Stream Encoding
- WDR(120dB), Day/Night (ICR), 3DDNR, ROI, EIS, AWB, AGC, BLC
- Built-in 1/1 alarm in/out, PoE , Micro SD Card
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

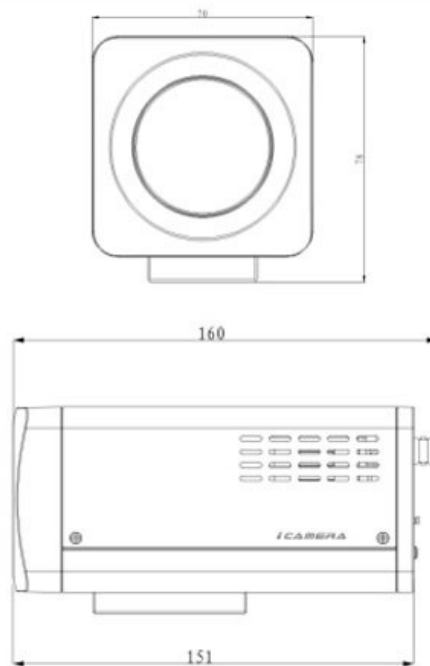

**Product casing and specifications are subject to change without prior notice*

CP- UNP-3021D-P

2MP 30x Network Box Zoom Camera



Feature

Image Sensor
Effective Pixels
S/N Ratio
Minimum Illumination
Focal Length
White Balance
Focus Control
Close Focus Distance
Angle of View
Electronic Shutter
AGC control
Back Light Compensation
Optical Zoom
Digital Zoom
Privacy Masking
Day/Night: IR Cut Filter
Video Compression
Video Streaming
Motion Detection
Audio Compression
ROI
Audio Streaming
Networking
IVS
Protocols
Alarm
Max Remote Users
Operating Temperature
Smart Phone

Specification

1/2.8" CMOS
1920(H) x 1080(V), 2 Megapixels
More than 55dB
Color: 0.005Lux@F1.6; B/W: 0.0005Lux@F1.6
4.5mm~135mm
Auto, ATW, Indoor, Outdoor, Manual
Auto / Manual
100mm~ 1000mm
H: 67.8° ~ 2.4°
1/1s~1/300,000s
Auto / Manual
BLC / HLC / WDR (120dB)
30x
16x
Up to 24 areas
Auto (ICR) / Color / B/W
H.265/H.264/MJPEG
Main stream: 1080P/720P(1 ~ 50/60fps), 1.3M(1 ~ 25/30fps) , Sub stream1: D1/CIF(1 ~ 25/30fps) , Sub stream2: 1080P/1.3M/720P/D1/ CIF (1 ~ 25/30fps)
Support
G.711a/G.711Mu/AAC/G.722 / G.726/G.729/ MPEG2-L2
Supports
1/1 channel In/Out
RJ-45 (10/100Base-T), 1RS485, 1RS232
Tripwire, Intrusion, Abandoned/Missing, Face Detection
IPv4/IPv6,HTTP,HTTPS,SSL,TCP/IP, UDP, UPnP, ICMP,IGMP,SNMP,RTSP,RTP, SMTP, NTP,DHCP, DNS,PPPOE,DDNS,FTP, IP Filter,QoS,Bonjour,802.1x, ONVIF, PSIA, CGI
2/1 channel In/Out
20 users
-40°C ~ 70°C (-40°F ~ +158°F) / Less than 90% RH
iPhone, iPad, Android Phone



CP- UNP-3021D-P

2MP 30x Network Box Zoom Camera



Feature

Memory Slot
Dimension
Weight
Power Source
Power Consumption
Regulatory

Specification

Micro SD, Max 128GB
Φ160mm×70mm×70mm
1.0kg
DC12V/1.5A, PoE(802.3af)
10W
CE, FCC, RoHS & UL