


# CP- UNP-3021L15DA

2MP 30x WDR IP IR PTZ Dome Camera - 150 Mtr.

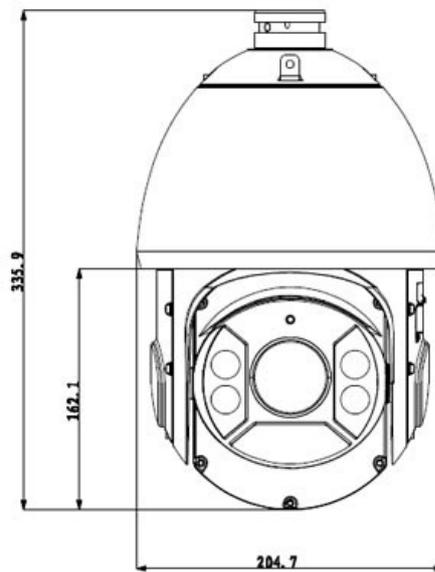

## Main Features

- 1/2.8" CMOS Image sensor
- Max. 50/60fps@1080P
- Powerful 30x Optical and 16x Digital zoom
- H.265 Encoding
- WDR(120dB), Day/Night (ICR), Ultra DNR, Auto iris, Auto focus, BLC, HLC
- Up to 300 Presets, 8 Tour, 5 Pattern, Auto scan, Auto Pan
- Max 240°/s pan speed, 360° endless pan rotation
- Built-in 2/1 alarm in/out, IP66, PoE, Micro SD, 150 Mtr. IR
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



\*Product casing and specifications are subject to change without prior notice

# CP- UNP-3021L15DA

2MP 30x WDR IP IR PTZ Dome Camera - 150 Mtr.



## Feature

Image Sensor  
 Effective Pixels  
 S/N Ratio  
 Minimum Illumination  
 Focal Length  
 White Balance  
 Focus Control  
 Close Focus Distance  
 Angle of View  
 Electronic Shutter  
 AGC control  
 Back Light Compensation  
 Optical Zoom  
 Digital Zoom  
 Pan Travel  
 Tilt Travel  
 Presets  
 Preset Speed  
 Privacy Masking  
 Special Features  
 Power up Action  
 Idle Motion  
 Day/Night: IR Cut Filter  
 Video Compression  
 Video Streaming  
 Audio Compression  
 Audio Streaming  
 Auto Tracking  
 Networking  
 IVS

## Specification

1/2.8" CMOS  
 1920(H) x 1080(V) 2Mp  
 More than 55dB  
 Color: 0.005Lux@F1.6; B/W: 0.0005Lux@F1.6  
 4.5mm ~ 135.0mm  
 Auto, ATW, Indoor, Outdoor, Manual  
 Auto / Manual  
 1100mm~1000mm  
 H: 67.8° ~ 2.4°  
 1/50 ~ 1/30,000s  
 Auto / Manual  
 BLC / HLC / WDR(120dB)  
 30x  
 16x  
 0° ~ 360° endless, Pan Speed: 0.1° ~160° /s  
 -15° ~ 90°, auto flip 180°, Tilt Speed: 0.1° ~120°/s  
 300  
 Pan: 240° /s; Tilt: 200° /s  
 Up to 24 areas  
 IR Range of 150 Mtr., EIS, ROI, Defog, Up to 300 Presets, 5 Pattern, 8 Tour, Auto Pan, Auto Scan,  
 Auto restore to previous PTZ and lens status after power failure  
 Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period  
 Auto (ICR) / Color / B/W  
 H.265 /H.264 / MJPEG  
 Main Stream: 1080P/D1 (1 ~ 50/60fps), 1.3MP(1~25/30fps), Sub Stream1: D1/CIF(1 ~ 25/30fps), Sub Stream 2: 1080P/1.3M/720P/D1/CIF (1 ~ 25/30fps)  
 G.711a/G.711Mu/AAC/G.722 / G.726/G.729/MPEG2-L2  
 1/1 channel In/Out  
 Supports  
 RJ-45 (10/100Base-T), 1RS485  
 Tripwire, Intrusion, Abandoned Object Detection, Missing Object Detection, Face Detection



\*Product casing and specifications are subject to change without prior notice

# CP- UNP-3021L15DA

2MP 30x WDR IP IR PTZ Dome Camera - 150 Mtr.



## Feature

Tracking Trigger Mode

Protocols

Tracking Trigger Event

Alarm

Max Remote Users

Operating Temperature

Smart Phone

Memory Slot

Weather Proof Standard

Dimension

Weight

Power Source

Power Consumption

Regulatory

## Specification

Manual / Auto (alarm triggered)

IPv4/IPv6,HTTP,HTTPS,SSL,TCP/IP, UDP, UPnP, I CMP,IGMP,SNMP,RTSP,RTP, SMTP, NTP,DHCP, DNS,PPPOE,DDNS,FTP, IP Filter, QoS, Bonjour,802.1x, ONVIF, PSIA, CGI

Targeting, Zoom, Tracking, Recording, Snapshot, Alarm and etc.

2/1 channel In/Out

20 users

-40°C ~ 60°C (-40°F ~ +140°F) / Less than 90% RH

iPhone, iPad, Android Phone

Micro SD, Max 128GB

IP66 & IK10(optional)

Φ204.7(mm) x 359.9(mm)

7.8kg

AC24V/3A(±10%)

10.5W,26W (IR on)

CE, FCC, RoHS & UL