


CP- UNP-3021L18-DA

2MP 30x WDR Network IR PTZ Dome Camera - 180 Mtr.

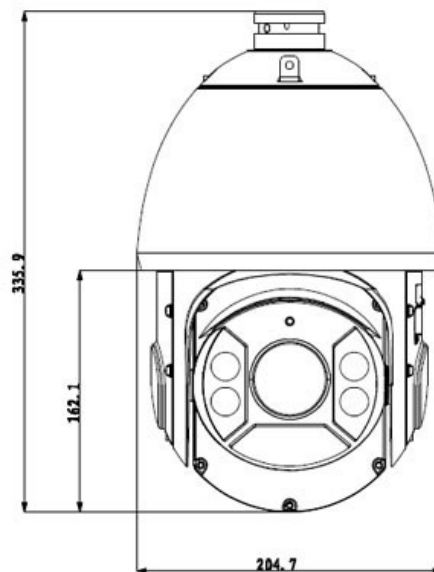

Main Features

- 1/2.8" CMOS Image sensor
- Max. 50/60fps@1080P
- Powerful 30x Optical and 16x Digital zoom
- H.265 Encoding
- WDR, Day/Night (ICR), 3D DNR, Auto iris, Auto focus
- Up to 300 Presets, 8 Tour, 5 Pattern, 8 Auto scan
- Max 240°/s pan speed, 360° endless pan rotation
- Built-in 2/1 alarm in/out, IP66, IK10, Micro SD, 180 Mtr. IR
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNP-3021L18-DA

2MP 30x WDR Network IR PTZ Dome Camera - 180 Mtr.



Feature

Image Sensor

Effective Pixels

S/N Ratio

Minimum Illumination

Focal Length

Focus Control

White Balance

Close Focus Distance

Angle of View

Electronic Shutter

AGC control

Back Light Compensation

Optical Zoom

Digital Zoom

Pan Travel

Tilt Travel

Presets

Preset Speed

Privacy Masking

Special Features

Power up Action

Idle Motion

Day/Night: IR Cut Filter

Video Compression

Video Streaming

Audio Compression

Audio Streaming

Auto Tracking

Pre/Post Alarm Buffer

Watermark

IVS

Specification

1/2.8" CMOS

1920(H) x 1080(V) 2Mp

More than 55dB

Color: 0.005Lux@F1.6; 0Lux@F1.6 (IR on)

4.5mm ~ 135.0mm

Auto / Manual

Auto, ATW, Indoor, Outdoor, Manual

1100mm~1000mm

H: 67.8° ~ 2.4°

Auto/ Manual, 1/1s~1/300,000s

Auto / Manual

BLC / HLC / WDR(120dB)

30x

16x

0° ~ 360° endless, Pan Speed: 0.1° ~160° /s

-15° ~ 90°, auto flip 180°, Tilt Speed: 0.1° ~120°/s

300

Pan: 240° /s; Tilt: 200° /s

Up to 24 areas

IR Range of 180 Mtr., EIS, ROI, Defog, Up to 300 Presets, 5 Pattern, 8 Tour, Auto Pan, Auto

Auto restore to previous PTZ and lens status after power failure

Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period

Auto (ICR) / Color / B/W

H.265+/H.265/H.264+/H.264

Main stream: 1080P/1.3M/720P(1~50/60fps) , Sub stream1: D1/CIF(1 ~ 25/30fps) , Sub stream2: 1080P/1.3M/720P/D1/CIF (1~25/30fps)

G.711a/G.711Mu/AAC/G.722 / G.726/G.729/MPEG2-L2

1/1 channel In/Out

Supports

Supports

Supports

Tripwire, Intrusion, Abandoned/Missing, Face Detection



*Product casing and specifications are subject to change without prior notice

CP- UNP-3021L18-DA

2MP 30x WDR Network IR PTZ Dome Camera - 180 Mtr.



Feature

Networking

Protocols

Alarm

Max Remote Users

Operating Temperature

Smart Phone

Memory Slot

Weather Proof Standard

Casing

Dimension

Weight

Power Source

Power Consumption

Specification

RJ-45 (10/100Base-T), 1RS485

IPv4/IPv6,HTTP,HTTPS,SSL,TCP/IP, UDP, UPnP, ICMP,IGMP,SNMP,RTSP,RTP, SMTP, NTP,DHCP,DNS,PPPOE,DDNS,FTP, IP Filter,QoS,Bonjour,802.1x, ONVIF (Profile S), PSIA, CGI

2/1 channel In/Out

20 users

-40°C ~ 60°C (-40°F ~ +140°F) / Less than 90% RH

iPhone, iPad, Android Phone

Micro SD, Max 128GB

IP66 & IK10

Aluminium Alloy

Φ205(mm) x 336(mm)

7.8 kg

AC24V/3A(±10%)

10.5W,26W (IR on)