


CP- UNP-3041L10DA-P**4MP 30x WDR IR PTZ Dome Camera - 100 Mtr.****Main Features**

- 1/3" 4MP CMOS Image sensor
- Max. 25/30fps@4M, 50/60fps@1080P resolution
- Powerful 30x Optical and 16x Digital zoom
- H.265 and H.264 Encoding, Ultra-low bit rate transmission
- WDR (120dB), Day/Night (ICR), 3D DNR, Auto iris, Auto focus
- Up to 300 Presets, 8 Tour, 5 Pattern, 8 Auto scan, 8 Auto Pan
- Max 400°/s pan speed, 360° endless pan rotation
- Built-in 2/1 alarm in/out, IP66, PoE+, Micro SD, 100 Mtr. IR
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

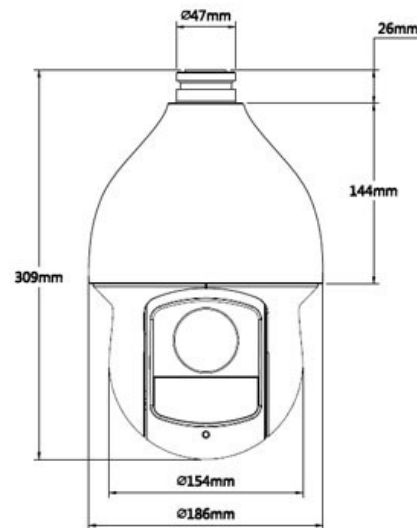

*Product casing and specifications are subject to change without prior notice

CP- UNP-3041L10DA-P

4MP 30x WDR IR PTZ Dome Camera - 100 Mtr.



Feature

Image Sensor
Effective Pixels
S/N Ratio
Minimum Illumination
Focal Length
Focus Control
White Balance
Close Focus Distance
Angle of View
Electronic Shutter
AGC control
Back Light Compensation
Optical Zoom
Digital Zoom
Pan Travel
Tilt Travel
Presets
Preset Speed
Special Features
Privacy Masking
Power up Action
Time Task
Idle Motion
Day/Night: IR Cut Filter
Video Compression
Video Streaming
Audio Compression
Audio Streaming
Auto Tracking

Specification

1/3" CMOS
2592(H) x 1520(V), 4 Megapixels
More than 55dB
Color: 0.05Lux@F1.6; 0Lux@F1.6(IR on)
4.5mm ~ 135.0mm
Auto / Manual
Auto, ATW, Indoor, Outdoor, Manual
100mm~ 1000mm
H: 60° ~ 2.2°
1/50 ~ 1/30,000s
Auto / Manual
BLC / HLC / WDR (120dB)
30x
16x
0° ~ 360° endless, Pan Speed: 0.1° ~ 300°/sec
-15° ~ 90°, auto flip 180°, Tilt Speed: 0.1° ~ 200°/sec
300
Pan: 400° /s; Tilt: 300° /s
IR Range of 100 Mtrs., Defog, ROI, EIS, Up to 300 Presets, 8 Tour, 5 Pattern, 8 Auto scan, 8 Auto Pan
Up to 24 areas
Auto restore to previous PTZ and lens status after power failure
Auto activation of Preset/Pan/Scan/Tour/Pattern by preset-time
Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period
Auto (ICR) / Color / B/W
H.265 / H.264 / MJPEG
Main Stream: 4M/3M(1~25/30fps)/1080P(1~50/60fps)/1.3M/720P(1~25/30fps), Sub Stream1: D1/CIF(1 ~ 25/30fps), Sub Stream 2: 1080P /960P/720P(1 ~ 25/30fps)
G.711a/G.711Mu/AAC/G.722 / G.726/G.729
1/1 channel In/Out
Support



*Product casing and specifications are subject to change without prior notice

CP- UNP-3041L10DA-P

4MP 30x WDR IR PTZ Dome Camera - 100 Mtr.



Feature

IVS
Networking
Protocols
Alarm
Max Remote Users
Memory Slot
Smart Phone
Operating Temperature
Weather Proof Standard
Dimension
Weight
Power Source
Power Consumption

Specification

Tripwire, Intrusion, Abandoned/Missing, Face Detection
RJ-45 (10/100Base-T)
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x, ONVIF, PSIA, CGI
2/1 channel In/Out
20 users
Micro SD, Max 128GB
iPhone, iPad, Android Phone
-40°C ~ 70°C (-40°F ~ +158°F) / Less than 90% RH
IP66
Φ186mm × 309mm
3.5 kg
AC24V/3A(±10%), PoE+(802.3at)
PoE: 13W, 20W (IR on), AC24V: 13W, 23W (IR on)