


CP- UNP-3051L20A**5MP 30x Network IR PTZ Camera****Main Features**

- 1/1.9" CMOS Image sensor
- Max 30fps@5Mp and 60fps@1080P resolution
- Powerful 30x Optical zoom
- DWDR, Day/Night (ICR), 3D DNR, Defog, EIS, BLC, HLC, AGC
- Up to 300 Presets, 8 Tour, 5 Pattern, 8 Auto scan, 8 Auto Pan
- Max 240°/s pan speed, 360° endless pan rotation
- IR Range of 200 Mtr. , Support Hi-PoE
- Built-in 7/2 alarm in/out, IP67, IK10
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

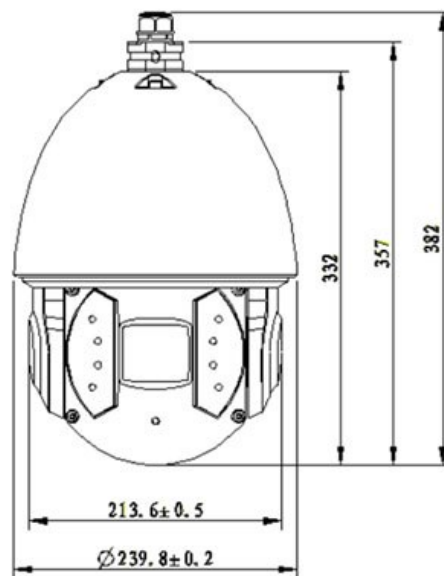

**Product casing and specifications are subject to change without prior notice*

CP- UNP-3051L20A

5MP 30x Network IR PTZ Camera



Feature

Image Sensor
Effective Pixels
Video Output
S/N Ratio
Minimum Illumination
Focal Length
White Balance
Focus Control
Close Focus Distance
Angle of View
AGC control
Back Light Compensation
Optical Zoom
Digital Zoom
Pan Travel
Tilt Travel
Manual Speed
Presets
Preset Speed
Special Features
Privacy Masking
Power up Action
Idle Motion
Day/Night: IR Cut Filter
Video Compression
Video Streaming
Audio Compression
Auto Tracking
Audio Streaming

Specification

1/1.9" CMOS Image Sensor
2560(H) x 1920(V), 5 Megapixels
BNC(1.0Vp-p/75Ω), PAL / NTSC
More than 55dB
Color: 0.01Lux@F1.5; 0Lux@F1.5(IR on)
6mm ~ 180mm
Auto, ATW, Indoor, Outdoor, Manual
Auto / Manual
100mm~ 1000mm
H: 61.2° ~ 2.1°
Auto / Manual
BLC / HLC / DWDR
30x
16x
0° ~ 360° endless, Pan Speed: 0.1° ~ 200°/sec
-20° ~ 90°, auto flip 180°, Tilt Speed: 0.1° ~ 120°/sec
Pan: 0.1° ~ 200° /s; Tilt: 0.1° ~ 120° /s
300
Pan: 240° /s; Tilt: 200° /s
Defog, EIS, ROI, Motion Detection, IR Range of 200 Mtr., Up to 300 Presets, 8 Tour, 5 Pattern, 8 Auto scan, 8 Auto Pan
Up to 24 areas
Auto restore to previous PTZ and lens status after power failure
Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period
Auto (ICR) / Color / B/W
H.265/H.264 / MJPEG
Main Stream: 5M/3M/1.3M/720P(1~25/30fps), 1080P(1~50/60fps), Sub Stream1: D1/CIF(1 ~ 25/30fps), Sub Stream 2: 5M(1~20fps), 1080P/1.3M/720P(1~25/30fps)
G.711a/G.711Mu/AAC/G.722/ G.726/ MPEG2-L2
Support
1/1 channel In/Out



CP- UNP-3051L20A

5MP 30x Network IR PTZ Camera



Feature

Networking

IVS

Protocols

Alarm

Max Remote Users

Operating Temperature

Smart Phone

Memory Slot

Weather Proof Standard

Dimension

Weight

Power Source

Power Consumption

Specification

RJ-45 (10/100Base-T), 1RS485

Tripwire, Intrusion, Abandoned/Missing, Face Detection

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x, ONVIF, PSIA, CGI

7/2 channel In/Out

20 users

-40°C ~ 70°C / Less than 95% RH

iPhone, iPad, Android Phone

Micro SD Card 128GB

IP67, IK10

Φ240mm × 382mm

6.8 kg

AC24V/3A(±25%), Hi-POE

24W, 38W (IR on)