


CP- UNP-4212T**2MP Full HD IP PTZ Camera****Main Features**

- 1/3" CMOS Image Sensor
- Powerful 12x Optical & 16x Digital zoom
- Max 25/30fps@1080P Resolution
- DWDR, Day/Night(ICR), DNR (2D, 3D)
- Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan
- Pan range: 360° endless, speed up to 300°/s
- Supports PoE, IP66
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

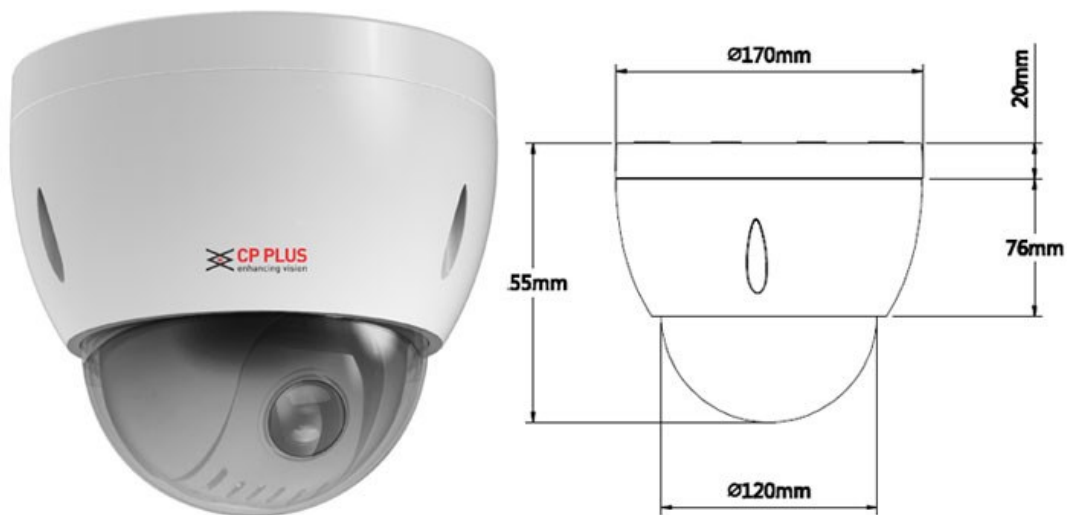

CP- UNP-4212T**2MP Full HD IP PTZ Camera****Feature**

Image Sensor
Effective Pixels
Horizontal Resolution
Video Output
S/N Ratio
Minimum Illumination
Focal Length
Focus Control
White Balance
Close Focus Distance
Angle of View
Electronic Shutter
AGC control
Back Light Compensation
Optical Zoom
Digital Zoom
Pan Travel
Tilt Travel
Presets
Special Features
Privacy Masking
Power up Action
Time Task
Idle Motion
Day/Night: IR Cut Filter
Video Compression
Video Streaming
Audio Compression
Audio Streaming

Protocols

Specification

1/3" CMOS
1944(H) x 1092(V), 2 Megapixels
>1000TVL
BNC(1.0Vp-p/75Ω), PAL / NTSC
More than 55dB
Color: 0.05Lux@F1.6, B/W: 0.005Lux@F1.6
5.1mm ~ 61.2mm
Auto / Manual
Auto, ATW, Indoor, Outdoor, Manual
100mm ~ 1000mm
H: 51.3° ~ 4.64°
1/3 ~ 1/30,000s
Auto / Manual
BLC / HLC / DWDR
12x
16x
360° endless, Pan Speed: 0.1° ~ 300°/sec
-2° ~ 90°, Tilt Speed: 0.1° ~ 120°/sec, auto flip 180°
255
Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan
Up to 24 areas
Auto restore to previous PTZ and lens status after power failure
Auto activation of Preset/Pan/Scan/Tour/Pattern by preset-time
Activate Preset/Pan/Scan/Tour/Pattern if there is no command in the specified period
Auto(ICR) / Color / B/W
H.264 / MJPEG
Main Stream: 25/30fps@1080P/720P, Sub Stream: 25/30fps@D1/CIF
G.711a / G.711u (32kbps) / PCM (128kbps)
1/1 channel In/Out

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF Profile S

CP- UNP-4212T

2MP Full HD IP PTZ Camera

Feature

Alarm
Max Remote Users
Smart Phone
Operating Temperature
Memory Slot
Weather Proof Standard
Dimension
Weight
Power Source
Power Consumption

Specification

2/1 channel In/Out
20 users
iPhone, iPad, Android, Windows Phone
-10°C ~ 60°C / Less than 90% RH
Micro SD, Max 64GB
IP66 & IK10 (optional)
Φ170mm×155mm
1.8Kg
AC24V/1.5A (±10%), POE+(802.3at)
12W