


**CP- UNP-E2521L15-DAP****2 MP 1080P IR IP PTZ Camera****Main Features**

- 1/2.8" 2MP Exmor R CMOS Image sensor
- Max. 50/60fps@1080P, 25/30/50/60fps@720P
- Powerful 25x Optical and 16x Digital zoom
- WDR(120dB), 3D DNR, Day/Night(ICR), BLC, HLC
- Up to 300 presets, 8 auto scan, 8 tour, 5 pattern, 8 auto pan
- IR Range of 150 Mtr. , IP66, Support PoE Plus
- Max 400° /s pan speed, 360° endless pan rotation
- Built-in 2/1 alarm in/out
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

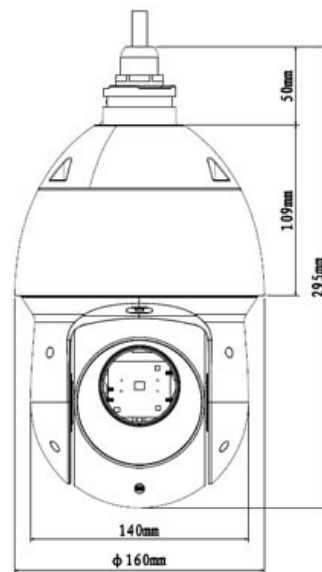

\*Product casing and specifications are subject to change without prior notice

# CP- UNP-E2521L15-DAP

## 2 MP 1080P IR IP PTZ Camera



### Feature

Image Sensor  
 Effective Pixels  
 S/N Ratio  
 Minimum Illumination  
 Focal Length  
 Focus Control  
 White Balance  
 Angle of View  
 Close Focus Distance  
 AGC control  
 Back Light Compensation  
 Optical Zoom  
 Digital Zoom  
 Pan Travel  
 Tilt Travel  
 Manual Speed  
 Presets  
 Preset Speed  
 Special Features  
 Privacy Masking  
 Power up Action  
 Idle Motion  
 Day/Night: IR Cut Filter  
 Video Compression  
 Video Streaming  
 Audio Compression  
 Audio Streaming  
 IVS  
 Networking  
 Protocols

### Specification

1/2.8" Exmor R CMOS  
 1920(H) x 1080(V), 2 Megapixels  
 More than 55dB  
 Color: 0.005Lux@F1.6; 0Lux@F1.6 (IR on)  
 4.8mm~120mm  
 Auto / Manual  
 Auto, ATW, Indoor, Outdoor, Manual  
 H: 59.2° ~ 2.4°  
 100mm~ 1000mm  
 Auto / Manual  
 BLC / HLC / WDR(120dB)  
 25x  
 16x  
 0°~360° endless, Pan Speed: 0.1° ~ 300°/sec  
 -15° ~ 90° auto flip 180°, Tilt Speed: 0.1° ~ 200°/sec  
 Pan: 0.1° ~ 300° /s; Tilt: 0.1° ~ 200° /s  
 300  
 Pan: 400° /s; Tilt: 300° /s  
 IR Range upto 150m, Up to 300 Presets, 5 Pattern, 8 Tour, 8 Auto Pan ,8 Auto Scan  
 Up to 24 areas  
 Auto restore to previous PTZ and lens status after power failure  
 Activate Preset/ Scan/ Tour/ Pattern if there is no command in the specified period  
 Auto(ICR) / Color / B/W  
 H.265/H.264 / MJPEG  
 Main stream: 1080P/720P/1.3M(1 ~ 50/60fps) , Sub stream1: D1/CIF(1 ~ 25/30fps) , Sub stream2: 1080P/1.3M/720P/D1/ CIF (1 ~ 25/30fps)  
 G.711a/G.711Mu/AAC/G.722 / G.726/G.729  
 1/1 channel In/Out  
 Tripwire, Intrusion, Abandoned/Missing, Face Detection  
 RJ-45 (10/100Base-T)  
 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x, ONVIF, PSIA, CGI



\*Product casing and specifications are subject to change without prior notice

# CP- UNP-E2521L15-DAP

## 2 MP 1080P IR IP PTZ Camera



### Feature

Alarm  
Max Remote Users  
Operating Temperature  
Memory Slot  
Smart Phone  
Weather Proof Standard  
Dimension  
Weight  
Power Source  
Power Consumption

### Specification

2/1 channel In/Out  
20 users  
-40°C ~ 70°C / Less than 90% RH  
Upto 128GB  
iPhone, iPad, Android Phone  
IP66  
Φ186.0(mm) x 309(mm)  
3.5kg  
AC24V/3A(±10%), PoE+(802.3at)  
13W,23W (IR on)