

RE 316H - 2L

Heat Detector



Product Overview

The RE 316H-2L Conventional detectors are designed to work with all conventional Panel. These detectors are low profile and have dual LED's for 360° visual indication. The LED's are blinking in normal operating condition whereas the steady state indicates fire status.

RE 316H-2L is a fixed cum rate of rise heat detector using a thermistor. These detectors will raise an alarm when the detector reaches 59°C (Fixed) or when the change in temperature exceeds the rate of rise of 11°C / min.



Features:

- UL listed.
- Dual LED's for 360° visibility.
- Advanced detection and communication protocol.
- Easy installation and maintenance.
- Sleek low-profile housing design.
- Regular 100mm base.
- Address setting by 8 digit DIP switch.

Electrical Specification


Operating Voltage	:	9 ~ 33V DC
Reset Voltage	:	less than 1V
Start-Up Current	:	120 μ A.
Alarm Current	:	40 mA (Max)
Remote Output	:	15mA maximum open collector
Thermal Rating	:	59 °C (138 °F)
Rate of Raise of Temp	:	11.1°C / min (20°F/min)
Operating Temperature	:	-10 °C to 37.8 °C
Humidity	:	0 - 95% RH, non-condensing



Mechanical Specification:

- Height : 46 mm with base
- Diameter : 100 mm dia
- Weight : 130g with base
- IP Rating : IP - 42

Wiring Diagram:

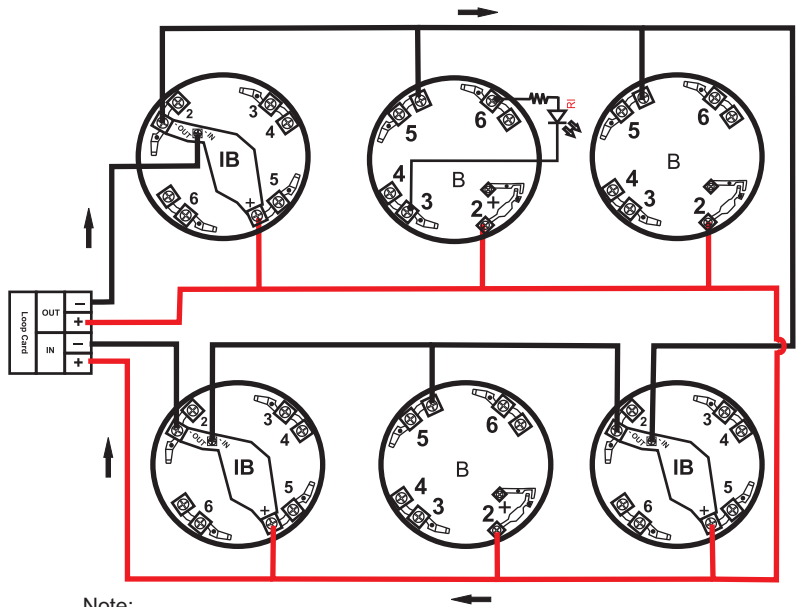

Note:

RI - Response Indicator
B - Standard Base
IB - Isolator Base

Compatible Device:

- RE-314B - Normal Base
- RE-314BI - Isolator Base

Ordering Information:

Model	Description
RE 316H - 2L	Heat Detector

RAVEL ELECTRONICS LTD.

Unit 11, Chancel Industrial Estate, Newhall street, Willenhall WV13 1NX, West Midlands, United Kingdom. E-mail: info@ravelfire.co.uk
Web: www.ravelfire.co.uk