


CP-UNC-DA10R3

1 MP HD Array Dome Camera - 30Mtr.

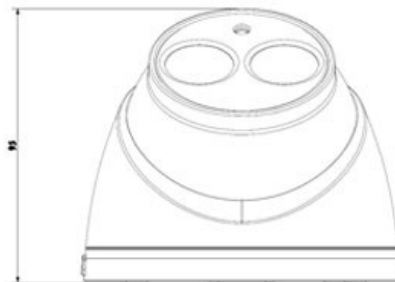

Main Features

- 1MP PS CMOS Image Sensor
- Max 25/30fps@720P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- Array Range of 30 Mtrs, IP67
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-DA10R3

1 MP HD Array Dome Camera - 30Mtr.

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
S/N Ratio
Back Light Compensation
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR

Protocol

Ethernet
User Account
IR
Smart Phone
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1MP Progressive scan CMOS
0. 1Lux/F2.1(Color), 0Lux/F2.1(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
3.6mm fixed lens (6mm optional)
More than 50dB
BLC/ HLC/ DWDR
H.264 / MJPEG
Main Stream: 720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
720P(1280×720)/ D1(704×576/704×480) /CIF(352×288/352×240)
Up to 4 areas
Auto(ICR)/Color/B/W

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)
20 Users
IR Range of 30 Mtr.
iPhone, iPad, Android, Windows Phone
-30°C~+60°C , Less than 95%RH
DC12V
Max 4W
IP67
φ110mm × 95mm
300g