


CP- UNC-TB20FL3-MD

2 MP Full HD IR Bullet Camera - 30Mtr.

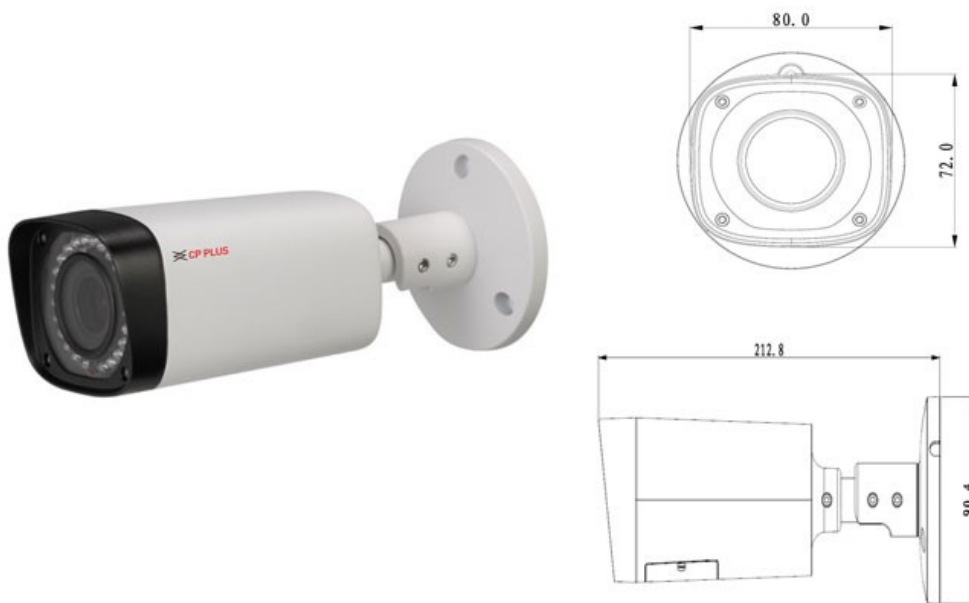

Main Features

- 1/3" 2MP PS CMOS Image Sensor
- Max 25fps@1080P
- H.264 and MJPEG dual-stream encoding
- WDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 2.7~12mm Varifocal lens
- IR Range of 30 Mtrs, IP66, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-TB20FL3-MD

2 MP Full HD IR Bullet Camera - 30Mtr.

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Video Compression
Back Light Compensation
S/N Ratio
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Output
Audio Compression

Specification

1/3" 2MP Progressive scan CMOS
0.01Lux/F2.1(Color), 0Lux/F2.1(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
2.7mm~12mm Lens
H.264/ H.264H/ H.264B/ MJPEG
BLC/ HLC/ WDR(120dB)
More than 50dB
Main Stream: 1080P/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
1080P(1920x1080) / 1.3M(1280x960) / 720P(1280x720) / D1(704x576/704x480) /CIF
Up to 4 areas
Auto(ICR)/Color/B/W
1Ch.
1Ch.
G.711a / G.711u

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
Micro SD, Max 64GB
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
Max 4.5W
IP66
72mm× 80mm× 212.8mm
0.65kg